



# **QDJ12WP / QDJ15WP**

## **PORTABLE SPEAKER SYSTEM**

### **Instruction Manual**

Please read this user manual carefully before system connection

Congratulations on your purchase of a Quantum Audio DJ speaker. Your selection of a Quantum Audio Product indicates a true appreciation of music.

### **KEEP YOUR SALES RECEIPT**

Take this time to attach your sales receipt to the manual and put in a safe place. In case of and unforeseen reason this product may need warranty service, your receipt will be necessary to establish a purchase date.

1. Warning: Do not open the unit case, damage to the internal circuits could result from doing so. There are no user serviceable parts inside. Failure to comply with this warning will result in warranty being void.
2. Ventilation: for proper operation the unit must have at least 12 inches of ventilation space around all sides. Do not enclose the unit with any type of material as this could cause the power amplifier to overheat and could result in failure.
3. When handling the power charging cord, use special care to handle the plug firmly. Do not pull from any other location other than the plug ends.
4. If the unit is not operating properly, it may require service. For service, please contact the establishment it was purchased from.

## **FEATURES**

- Bluetooth Function
- Plays MP3 files stored in SD card / USB drive / External audio device.
- FM Radio
- Guitar Input
- Microphone Input
- Wireless Microphone Included
- Remote Control
- Built-In 4.5A Rechargeable Battery
- Microphone Priority On/Off Switch
- Super Dynamic Sound Speaker
- TWS Connection




## **CONNECTING**

1. This set applies to AC 110V-240V, 50/60Hz
2. AC Power: Battery can be charged when connected to AC power. Red Light on battery is charging, it will change to green once battery completely charges.
3. Internal Battery will be charged even when device is off.
4. Speaker battery can be charged using 12V external car battery as well (12V charging cable not included) by “DC12V Input.” Please make sure “+” and “-” in right connection.
5. Adjust function keys to your personal audio preference.

## **BLUETOOTH INSTRUCTION**

Change the mode into “BLUE,” the bluetooth sign light flashes and speaker will give an audible beep alarm. Ensure you enable the Bluetooth function on your Bluetooth device. Search for Bluetooth connection until you find device model and pair.

## WIRELESS PAIRING (WP) CONNECTION













- STEP 1**  Push the Mode Button on both speakers until speakers are in Bluetooth Mode. Screen will display the word “**BLUE**”.
- STEP 2**  When both speakers are in Bluetooth mode, push and hold the WP/SCAN button for 3 seconds. You will hear a beep & screen display “bt/btst”. Next time you put both speakers in Bluetooth mode at the same time, speakers will connect automatically.
- STEP 3**  On your device, turn your Bluetooth settings “ON”, you will then select the unit and pair. Enjoy TWS (True Wireless Stereo) sound from your phone via Bluetooth!

## BATTERY & CHARGING


1. The unit takes approximately 8 hours to fully charge. It will automatically begin charging once the power cord is connected.
2. Low battery level may result in distorted sound, for best acoustical performance please monitor battery charge level.
3. To maximize the battery’s lifespan, please charging the battery immediately when the unit is not used for prolonged periods of time, the battery will gradually lose its power. It is recommended to fully charge the battery at least every 30 days.

## REMOTE CONTROL




-  Standby
-  USB / SD / LINE / BLUETOOTH (Audio input)
-  Prev / FM Ch-
-  Play / Pause / FM Tuner
-  Next / Fm Ch+
-  Repeat
-  Stop
-  Volume Up
-  Volume Down
-  Mute
-  Equalizer
-  Number

# QDJ15WP

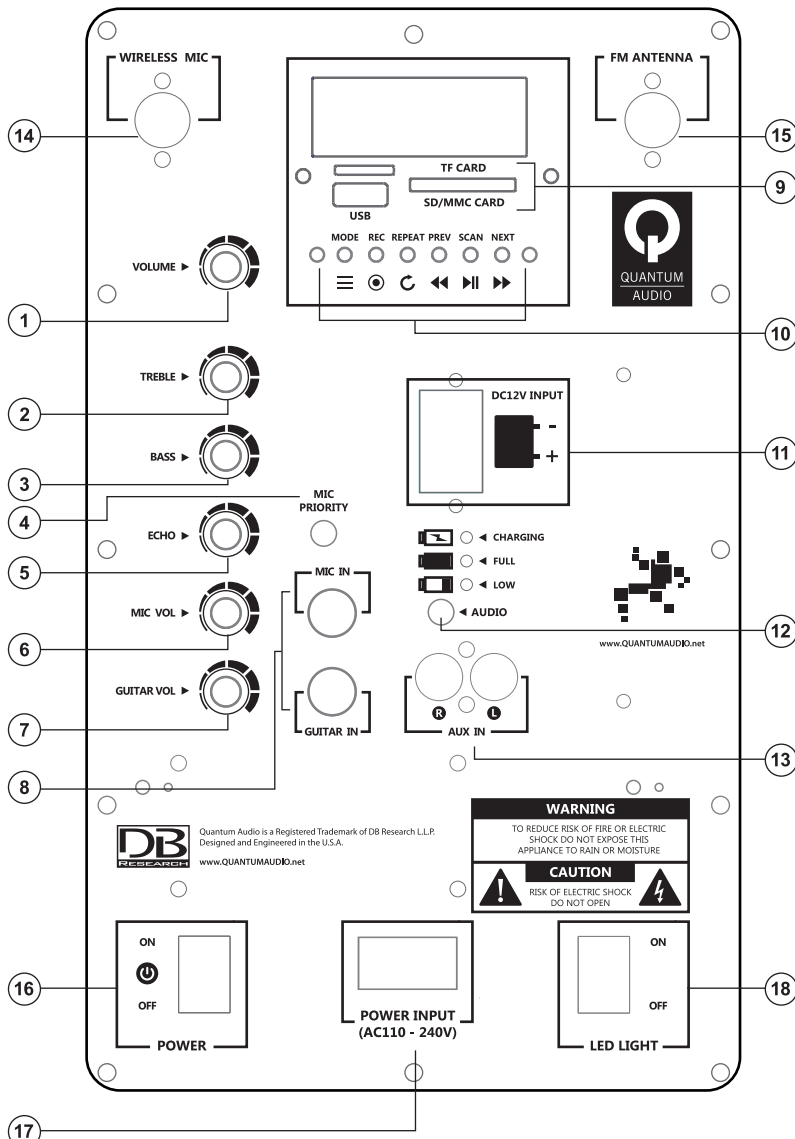

- ① **VOLUME:** Master Volume Adjust
- ② **TREBLE:** Treble Adjust
- ③ **BASS:** Bass Adjust
- ④ **MIC PRIORITY:** Microphone Priority On / Off switch
- ⑤ **ECHO:** Echo Adjust
- ⑥ **MIC VOLUME:** Microphone Volume Adjust
- ⑦ **GUITAR VOLUME:** Guitar Volume Adjust
- ⑧ **MIC IN/GUITAR IN:** Microphone Input / Guitar Input
- ⑨ **TF/USB/SD/MMC CARD** Input
- ⑩ **USB PANEL FUNCTION:**
  - ≡ Mode Select
  - Record - Insert the USB Memory /SD card and press this button to start recording. Pressing the button again stops recording.
  - ⌂ Repeat Select
  - ⏮ Play/Pause; FM Station Auto Searching
  - ⏪ Previous
  - ⏩ Next

# QDJ12WP

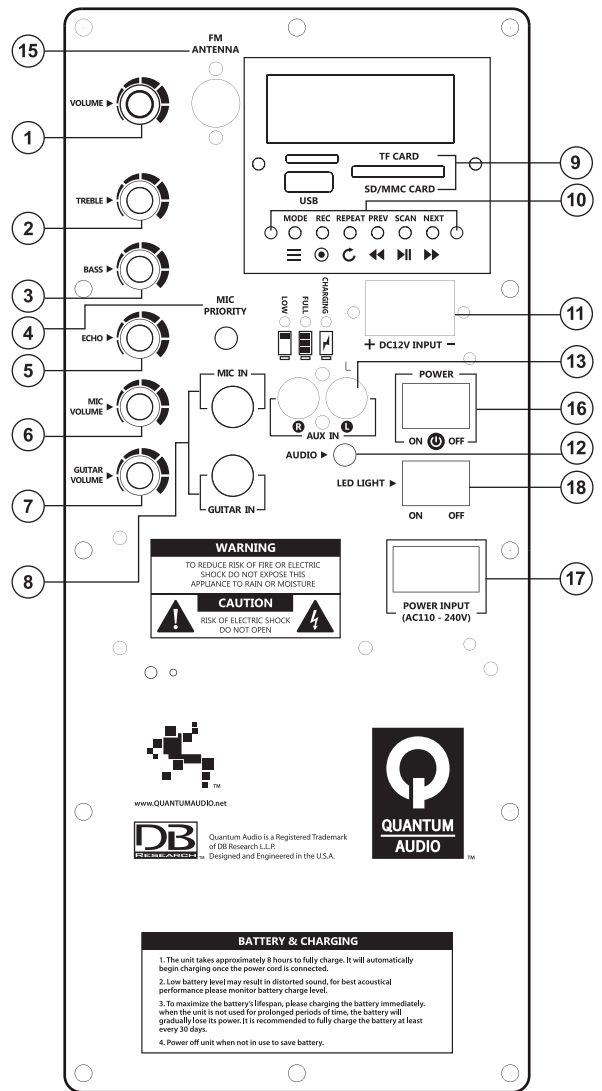

- ⑪ **12v EXTERNAL INPUT**
- ⑫ **MP3 IN**
- ⑬ **EXTERNAL AUDIO JACK**
- ⑭ **WIRELESS MICROPHONE ANTENNA**
- ⑮ **FM ANTENNA**
- ⑯ **POWER SWITCH**
- ⑰ **AC POWER INPUT:** Universal 110~240V/50-60Hz
- ⑱ **LED LIGHT** On / Off Switc



## **LIMITED WARRANTY**

Quantum Audio warrants any products purchased in the U.S.A. from an authorized Quantum Audio dealer. All products are warranted to be free from defects in material and workmanship under normal use and service for a period of one (1) year. This warranty applies to the original purchase only.

Quantum Audio will either repair or replace (as its option) any unit that has been found to be defective and under warranty provided the defect occurs within the one (1) year warranty period.

This limited warranty does not extend to units have been subjected to misuse, abuse, neglect, or accident. In Quantum Audio's judgment, products that show evidence of having been altered, modified, or serviced without Quantum Audio's authorization, will be ineligible under this warranty.

To obtain warranty service please contact your retailer or visit our website at [www.quantumaudio.net](http://www.quantumaudio.net) for more details.



**DB Research L.L.P.**

302 Hanmore Industrial Parkway // Harlingen, TX 78550

ph: 877.787.0101 // fx: 956.421.4513

[www.quantumaudio.net](http://www.quantumaudio.net)